


STARGUN

MANUAL EXTRUDERS LINE



**THE RESULT ALWAYS
DEPENDS
ON YOUR CHOICES**

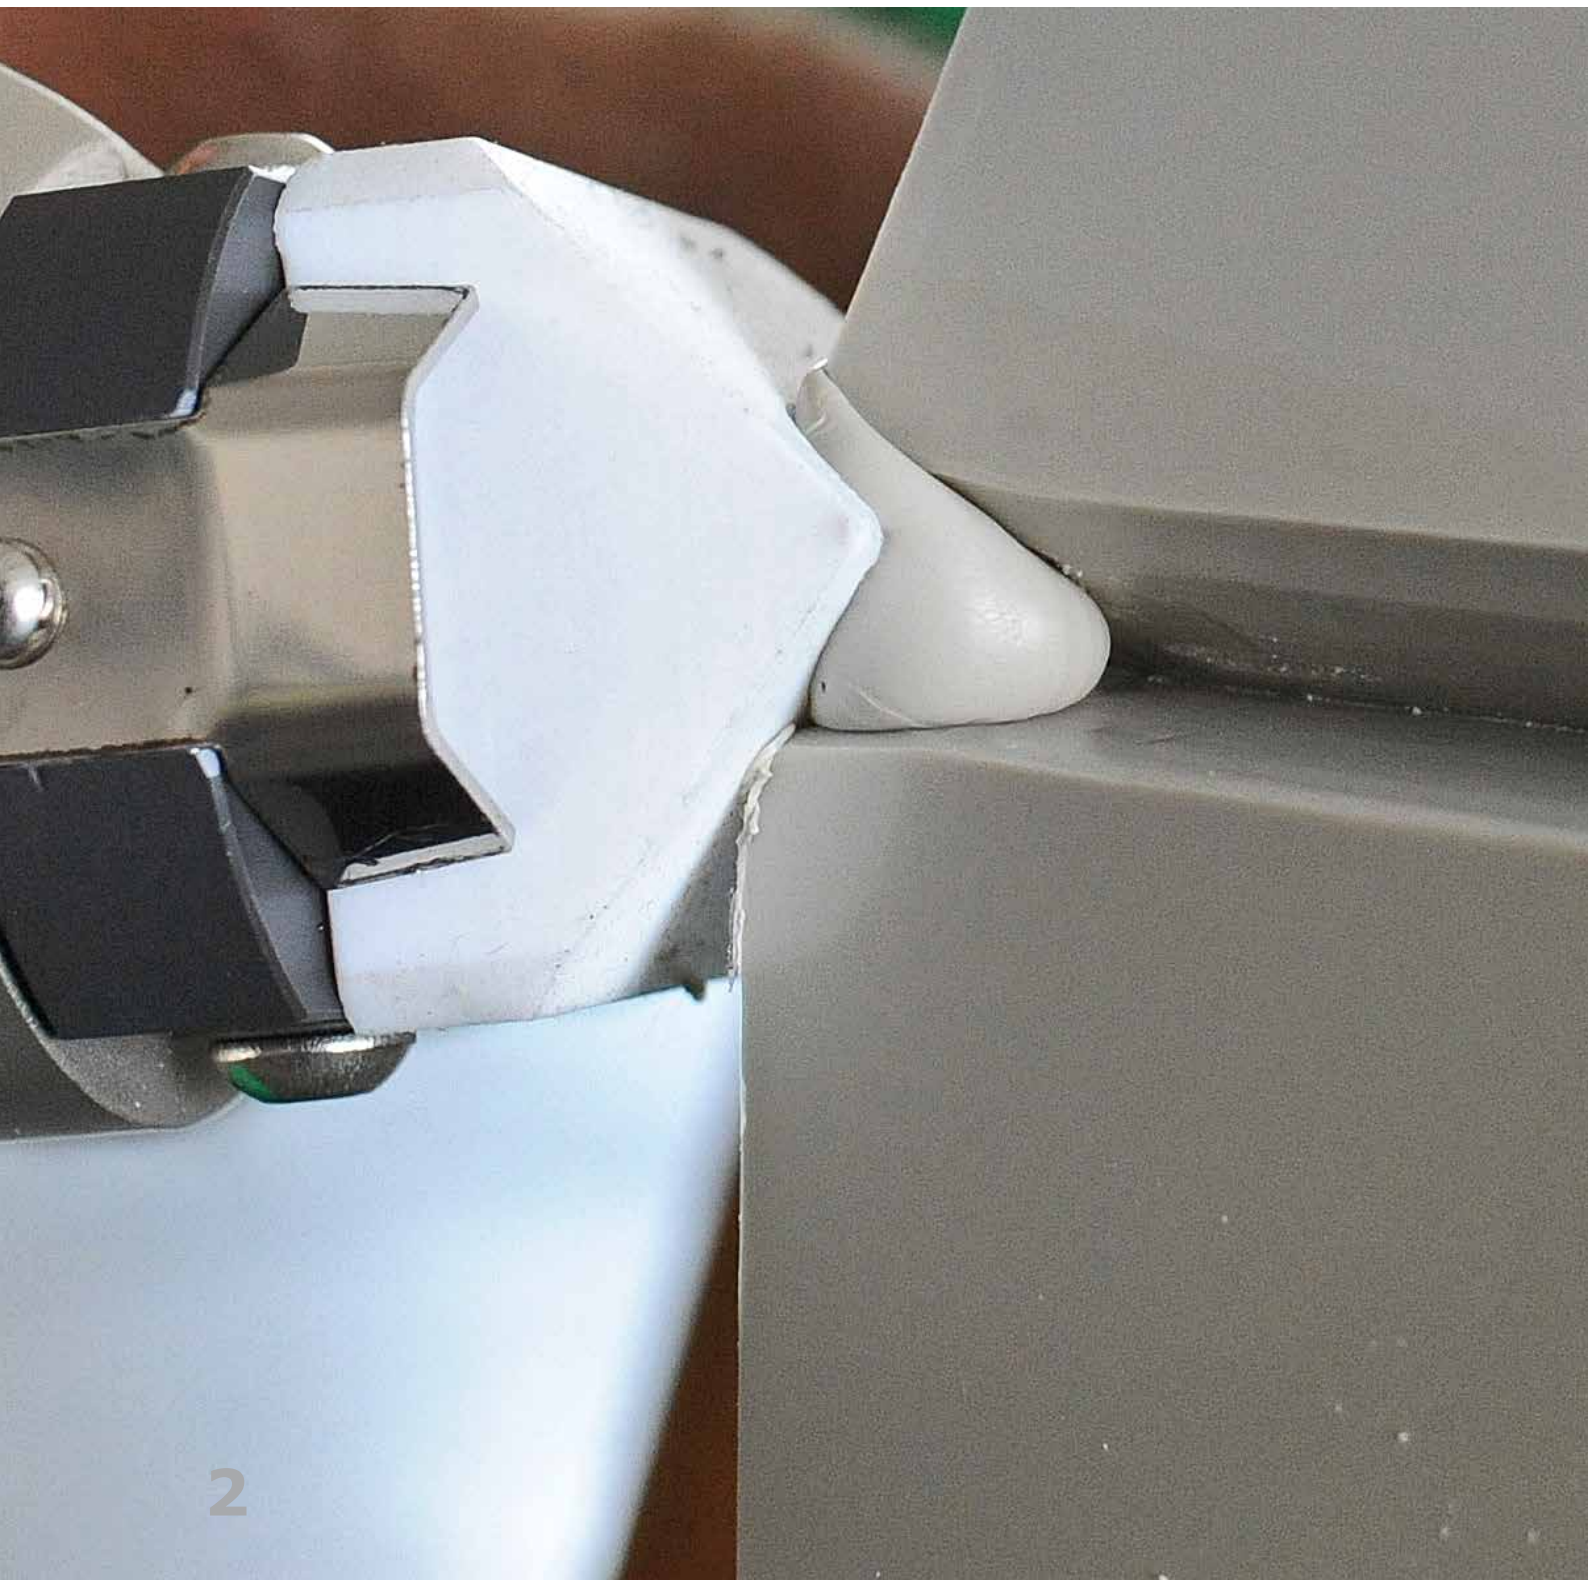

TECHNOLOGY AND QUALITY FOR PROFESSIONALS

**WELDABLE
MATERIALS:**

HDPE

PP

PVDF*

* check specifications
on each model

**STARGUN IS A COMPLETE EXTRUDER LINE
ABLE TO OFFER THE BEST TECHNOLOGICAL SOLUTIONS FOR
EXTRUSION WELDING**

Stargun LINK models 20/30/40

Quality, manageability, design. Three compact and user-friendly products.
The right choice for those who put quality in first place.



**DOUBLE TEMPERATURE
CONTROL:
AIR / PLASTIFICATION
WELDING ACCORDING
D.V.S. 2207-4**

Stargun K-SB models 50/60

Power and lightness. The strength of these models is their output.
The weight-power ratio combined with the high output make those extruders unique.



**DOUBLE TEMPERATURE
CONTROL:
AIR / PLASTIFICATION
WELDING ACCORDING
D.V.S. 2207-4**

Stargun SOLO models 20/30/40

Reliability and tradition. Three products that are not just a restyling, but a new concept: Simplification.
A reference for those who look for practicality at a fair price.




**SINGLE TEMPERATURE
CONTROL: HOT AIR**

STARGUN LINK SERIES: HIGHEST PERFORMANCE

ERGONOMICS


**CLEAN
AIR**

**WELDING
SPEED**

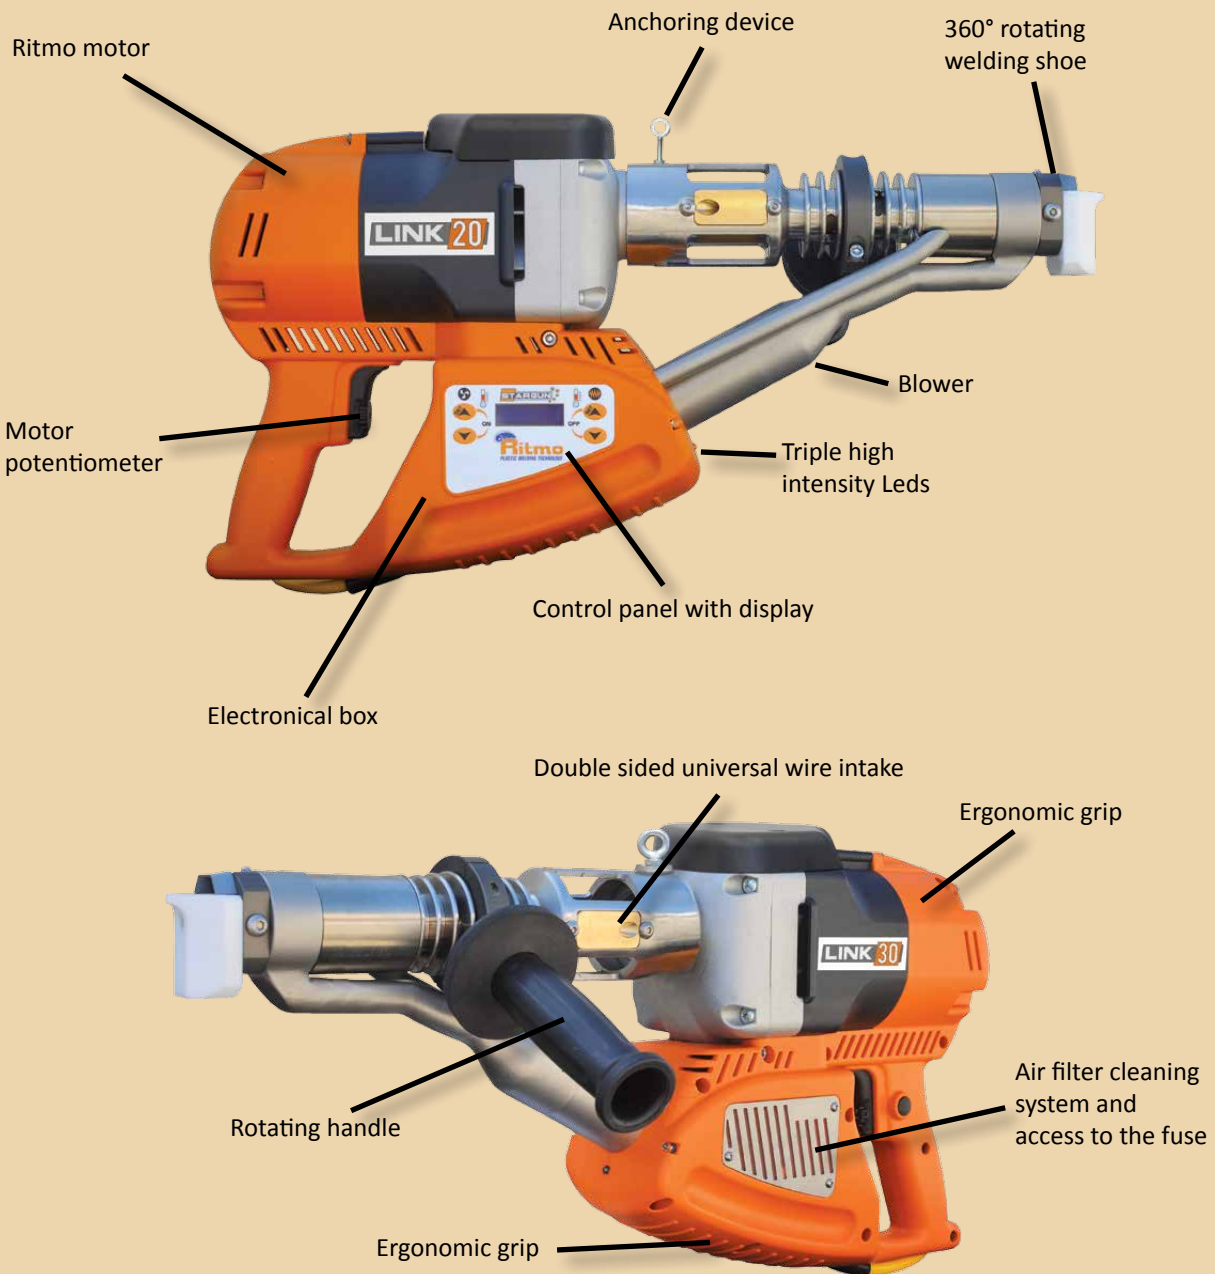



**REAR ERGONOMIC GRIP TO CONTROL PRESSURE AND SPEED.
THANKS TO AN INTERNAL AIR FLOW, THE GRIP ON THE MOTOR COVER
REMAINS COMFORTABLE EVEN AFTER A LONG USE**

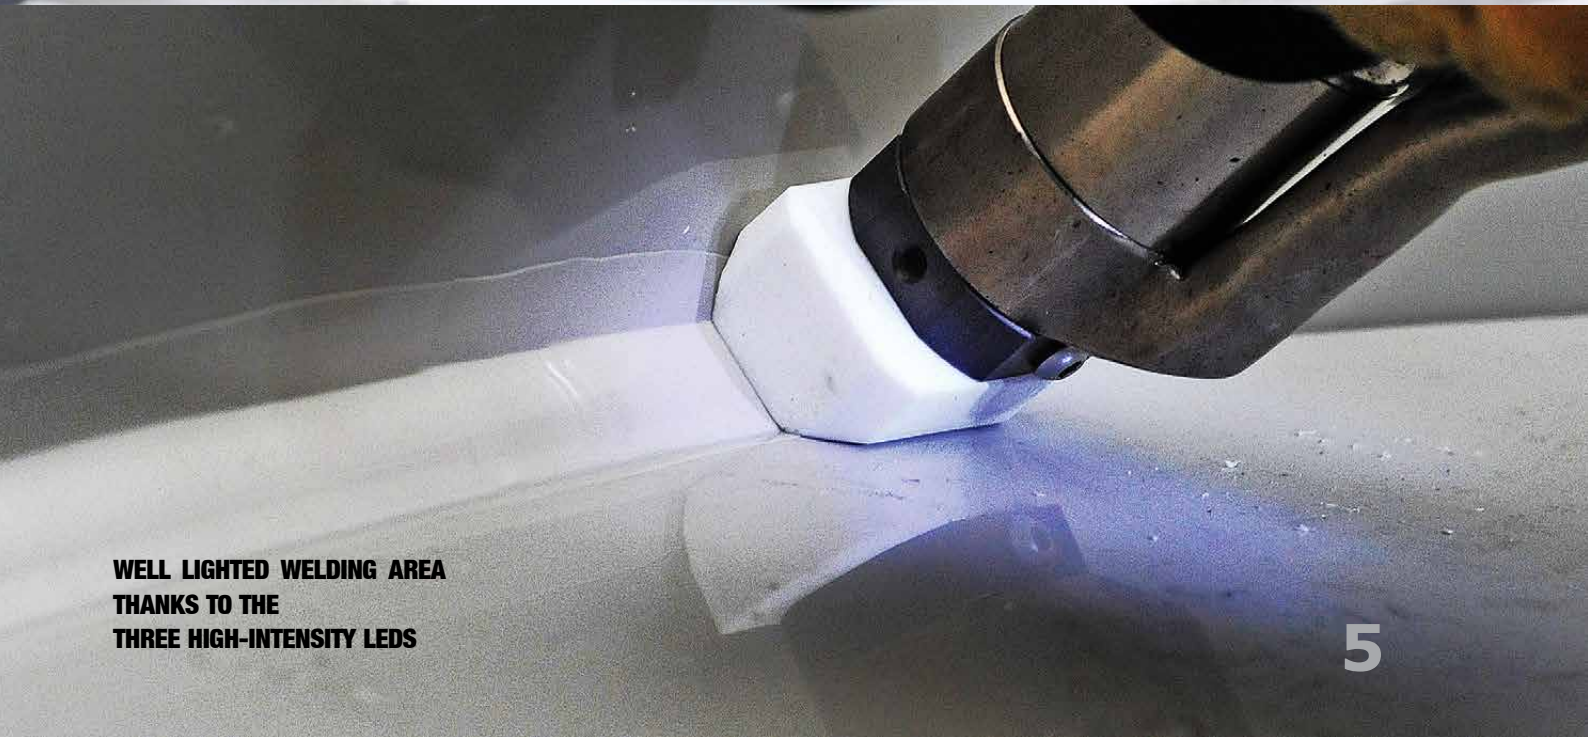

**WELL LIGHTED WELDING AREA
THANKS TO THE
THREE HIGH-INTENSITY LEDS**



Product code
 * LINK 20 CE plug 97800100
 * LINK 20 Schuko plug 97800102
 LINK 20 Germany edition Schuko plug 97800103

* Not available for the German market

LINK 20

Stargun LINK 20 is the most compact and light extruder of the product range. Its geometry combined with the reduced weight make this extruder the ideal solution to work in narrow places. The welding quality is guaranteed by the motor speed adjustment and the thermoregulator with double temperature control: air and plastification.

- Backlight display
- Triple LEDs for the lightening of the welding area
- Potentiometer; *security system "motor block/cold start"
- Independent blower
- Double T° thermoregulator: air/platification
- Rotating handle
- External fuse with simple access
- 360° rotating welding shoes. Easily replaceable.

Standard equipment:

LINK 20 with transport case and


- Rotating welding shoe mod. 90° - a 7 mm cod. 86777821
- Rotating welding shoe mod. V Flat 10/12 mm cod. 86777830

On request

Wide range of welding shoes

Materials	HDPE, PP, PVDF
Rods	Ø 3 - 4 mm
Sheets	1,5 ÷ 20 mm
** Output up to	2,2 Kg/h HDPE rod Ø 4 mm
Dimensions	510 x 260 x 110 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	3100 W
Weight	6,5 Kg

** the output varies depending on the material




Conical 20
86777817

Conical 14
86777818

WELDING SHOES LINK 20




90° - Welding




ACCORDING DVS STANDARD		
Model	Sheet thickness	Article
90° - a 4.2 mm	6 mm	86777819
90° - a 5.6 mm	8 mm	86777820
90° - a 7 mm	10 mm	86777821
90° - a 8,4 mm	12 mm	86777822
90° - a 10,5 mm	15 mm	86777823
90° - a 14 mm	20 mm	86777824

V - Welding "S"




X - Welding "S"



ACCORDING DVS STANDARD			
Model	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777829
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777830
V Flat - 15	15 mm	30 mm	86777831
V Flat - 20	20 mm	40 mm	86777832



Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)



Special nozzle 180 mm
86777800





Product code

* LINK 30 CE plug 97800110

* LINK 30 Schuko plug 97800112

LINK 30 Germany edition Schuko plug 97800113

* Not available for the German market

LINK 30

Stargun LINK 30 is able to weld wire of \varnothing 3-4-5 mm. Its output (up to 3,2 kg/h) together with its manageability make the LINK 30 the most versatile of the product range. The welding quality is guaranteed by the motor speed adjustment and the thermoregulator with double temperature control: air and plastification.

- Backlight display
- Triple LEDs for the lightening of the welding area
- Potentiometer; *security system "motor block/cold start"
- Independent blower
- Double T° thermoregulator: air/platification
- Rotating handle
- External fuse with simple access
- 360° rotating welding shoes. Easily replaceable.

Standard equipment:

LINK 30 with transport case and


- Rotating welding shoe mod. 90° - a 10,5 mm cod. 86777823
- Rotating welding shoe mod. V Flat - 15 mm cod. 86777831

On request


Wide range of welding shoes and Geotextile kit.

Materials	HDPE, PP, PVDF
Rods	\varnothing 3 - 4 - 5 mm
Sheets	1,5 ÷ 30 mm
** Output up to	3,2 Kg/h HDPE rod \varnothing 5 mm
Dimensions	540 x 260 x 110 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	3500 W
Weight	6,8 Kg

** The output varies depending on the material



Conical 20
86777817



Conical 14
86777818




Geotextile
86777814

WELDING SHOES LINK 30




90° - Welding




ACCORDING DVS STANDARD		
Model	Sheet thickness	Article
90° - a 5.6 mm	8 mm	86777820
90° - a 7 mm	10 mm	86777821
90° - a 8,4 mm	12 mm	86777822
90° - a 10,5 mm	15 mm	86777823
90° - a 14 mm	20 mm	86777824
90° - a 17,5 mm	25 mm	86777825
90° - a 21 mm	30 mm	86777826

V - Welding




X - Welding



ACCORDING DVS STANDARD			
Model	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777829
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777830
V Flat - 15	15 mm	30 mm	86777831
V Flat - 20	20 mm	40 mm	86777832



Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)



Special nozzle 180 mm
86777800





Product code

* LINK 40 CE plug 97800120

* LINK 40 Schuko plug 97800122

LINK 40 Germany edition Schuko plug 97800123

* Not available for the German market

LINK 40

Stargun LINK 40 is an extruder with high output able to extrude up to 4 kg/h. Its power combined with the manageability make it a high productive extruder. The welding quality is guaranteed by the motor speed adjustment and the thermoregulator with double temperature control: air and plastification.

- Backlight display
- Triple LEDs for the lightening of the welding area
- Potentiometer; *security system "motor block/cold start"
- Independent blower
- Double T° thermoregulator: air/plastification
- Rotating handle
- External fuse with simple access
- 360° rotating welding shoes. Easily replaceable.

Standard equipment:

Link 40 with transport box and


- Rotating welding shoe mod. 90° - a 10,5 mm cod. 86777823
- Rotating welding shoe mod. V Flat - 15 mm cod. 86777831

On request


Wide range of welding shoes and Geotextile kit

Materials	HDPE, PP
Rods	Ø 4 - 5 mm
Sheets	1,5 ÷ 30 mm
** Output up to	4 Kg/h HDPE rod Ø 5 mm
Dimensions	640 x 200 x 100 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	3500 W
Weight	7,6 Kg

** The output varies depending on the material



Conical 20
86777817



Conical 14
86777818




Geotextile
86777814

WELDING SHOES LINK 40




90° - Welding




ACCORDING DVS STANDARD		
Model	Sheet thickness	Article
90° - a 5.6 mm	8 mm	86777820
90° - a 7 mm	10 mm	86777821
90° - a 8,4 mm	12 mm	86777822
90° - a 10,5 mm	15 mm	86777823
90° - a 14 mm	20 mm	86777824
90° - a 17,5 mm	25 mm	86777825
90° - a 21 mm	30 mm	86777826

V - Welding




X - Welding



ACCORDING DVS STANDARD			
Model	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777829
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777830
V Flat - 15	15 mm	30 mm	86777831
V Flat - 20	20 mm	40 mm	86777832



Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)



Special nozzle 180 mm
86777800



LINK 4.00


EXTRACTION
Filma
110V 60Hz
1500W

STARGUN K-SB SERIES: SIMPLY POWERFUL

**HIGH
OUTPUT**

VERSATILE

LIGHT

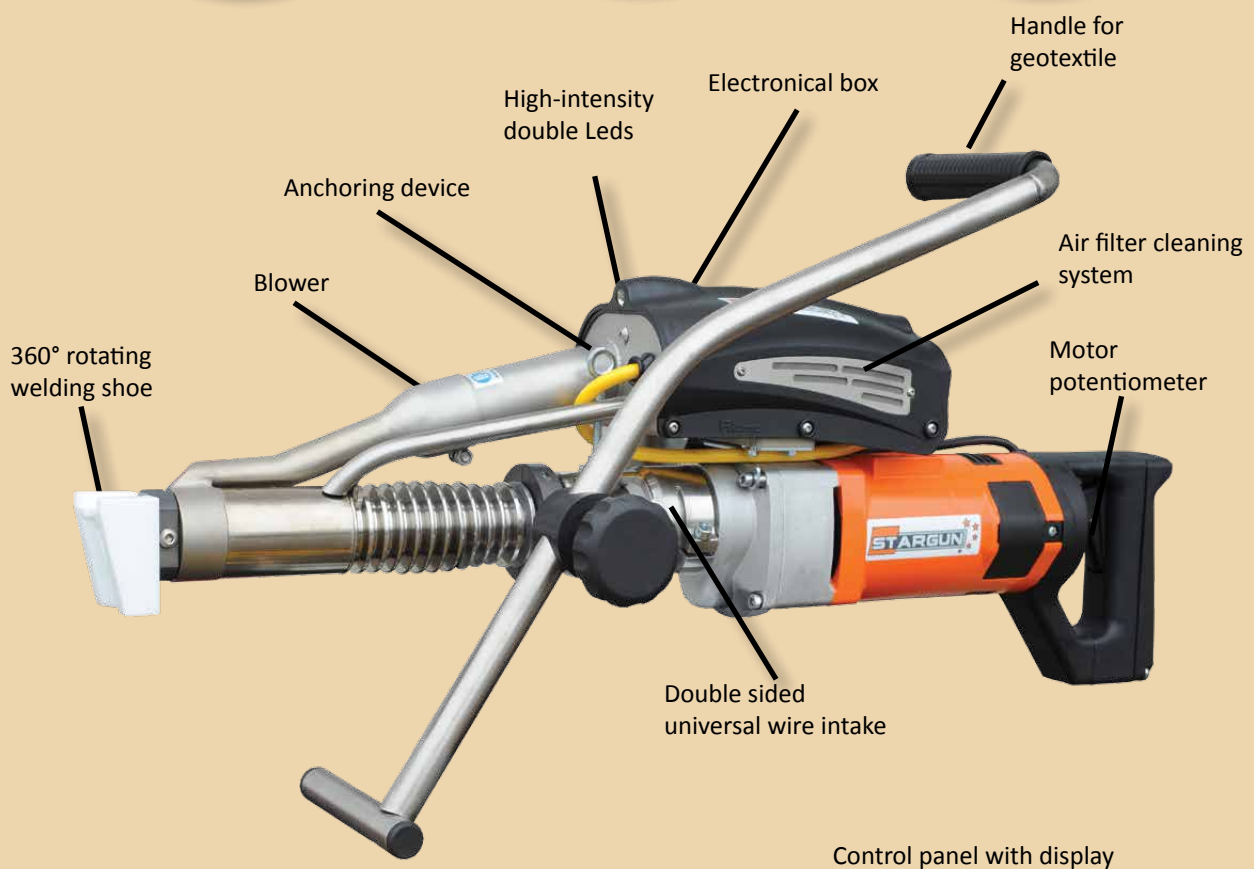

Control panel with display



A dark, textured background with a diagonal metallic rod or pipe running from the bottom left towards the top right. The rod has a brushed metal finish and is illuminated from the left, creating a bright highlight along its length. The background is a dark charcoal grey with some subtle, faint patterns.

**IT'S NOT ABOUT
WHAT YOU DO,
BUT HOW**

K-SB 50



K-SB 50 Back Handle

The powerful Stargun K-SB 50 is essential for all those jobs that require a high quantity of extruded material. K-SB 50 is suitable for welding linings, geo-textiles, sheets and thick pipes and for all kind off applications that need to resist against continuous stress. Output up to 5 kg/h.

- Potentiometer; security system "motor block/cold start"
- Independent blower
- Backlight display
- Double LEDs for the lightening of the welding area
- Double T° thermoregulator: air/plastification
- Rotating handle

Standard equipment with two different handles:

- K-SB 50 back handle, fixed lateral preheating with nozzle 32 mm (78947864C)
- K-SB 50 Pistol Grip, fixed lateral preheating with nozzle 32 mm (78947864C)
- Transport case with extruder support
- Welding shoe 90° fixed air - a 17,5 mm cod. 86777843
- Welding shoe V Flat fixed air - 25 mm cod. 86777851

On request
Welding shoes, KIT rotating welding shoes

Materiale	HDPE, PP
Rods	Ø 4 - 5 mm
Sheets	1,5 ÷ 40 mm
* Output up to	5 Kg/h HDPE rod Ø 5 mm
Dimensions (a) Back Handle (b) Pistol Grip	(a) 720 x 260 x 100 mm (b) 600 x 330 x 100 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	4000 W
Weight	9 Kg

* The output varies depending on the material



K-SB 50 Pistol Grip

K-SB 60



The powerful Stargun K-SB 60 is essential for all those jobs that require a high quantity of extruded material. K-SB 60 is suitable for welding linings, geo-textiles, sheets and thick pipes and for all kind off applications that need to resist against continuous stress. Output up to 6,2 kg/h.

- Potentiometer; security system "motor block/cold start"
- independent blower
- Backlight display
- Double LEDs for the lightening of the welding area
- Double T° thermoregulator: air/plastification
- Rotating handle

Standard equipment:

- K-SB 60 back handle, fixed lateral preheating with nozzle 32 mm (78947864C)
- Transport case with extruder support
- Welding shoe 90° fixed air - a 21 mm cod. 86777844
- Welding shoe V Flat fixed air - 30 mm cod. 86777852


On request
Welding shoes, KIT rotating welding shoes 360°,
KIT Geotextile

Materials	HDPE, PP
Rods	Ø 4 - 5 mm
Sheets	1,5 ÷ 40 mm
* Output up to	6.2 Kg/h HDPE rod Ø 5 mm
Dimensions	730 x 260 x 100 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	4200 W
Weight	9,3 Kg

* The output varies depending on the material



Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)



Special nozzle 180 mm
86777800



K-SB 50 / K-SB 60
with Geotextile KIT

TWO AIR FLOW SYSTEMS AVAILABLE



Standard equipment
Lateral fixed pre-heating,
complete with adapter
cod. 81567800




On request
Rotating air flow 360° requires
adapter cod. 81567801


WELDING SHOES K-SB 50 / K-SB 60




360° rotating air flow
adapter cod. 81567801
to be used with rotating
welding shoes




360° rotating welding
shoe°



Welding shoe with
fixed air



Welding shoe with
fixed air



90° - Welding



360° rotating welding
shoe


ACCORDING DVS STANDARD

Welding shoe with fixed air	Sheet thickness	Article
90° - a 7 mm	10 mm	86777839
90° - a 8,4 mm	12 mm	86777840
90° - a 10,5 mm	15 mm	86777841
90° - a 14 mm	20 mm	86777842
90° - a 17,5 mm	25 mm	86777843
90° - a 21 mm	30 mm	86777844
90° - a 24,5 mm	35 mm	86777845
90° - a 28 mm	40 mm	86777846


360° rotating air flow adapter cod. 81567801 to be used with rotating welding shoes	Sheet thickness	Article
90° - a 7 mm	10 mm	86777821
90° - a 8,4 mm	12 mm	86777822
90° - a 10,5 mm	15 mm	86777823
90° - a 14 mm	20 mm	86777824
90° - a 17,5 mm	25 mm	86777825
90° - a 21 mm	30 mm	86777826
90° - a 24,5 mm	35 mm	86777827
90° - a 28 mm	40 mm	86777828

ACCORDING DVS STANDARD

360° rotating air flow adapter cod. 81567801 to be used with rotating welding shoes	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777829
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777830
V Flat - 15	15 mm	30 mm	86777831
V Flat - 20	20 mm	40 mm	86777832
Welding shoe with fixed air	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777847
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777848
V Flat - 15	15 mm	30 mm	86777849
V Flat - 20	20 mm	35 - 40 mm	86777850
V Flat - 25	25 mm	-	86777851
V Flat - 30	30 mm	-	86777852
V Flat - 35	35 mm	-	86777853
V Flat - 40	40 mm	-	86777854



Conical 20
86777817




Conical 14
86777818




Geotextile
86777814


FIXED LATERAL AIR FLOW




Nozzle 18 mm
78947844C



Nozzle 25 mm
78947854C



Nozzle 32 mm
78947864C




Nozzle 48 mm
78947874C

STARGUN SOLO SERIES: ESSENTIAL CHARM

RELIABLE

SIMPLE

SOLID

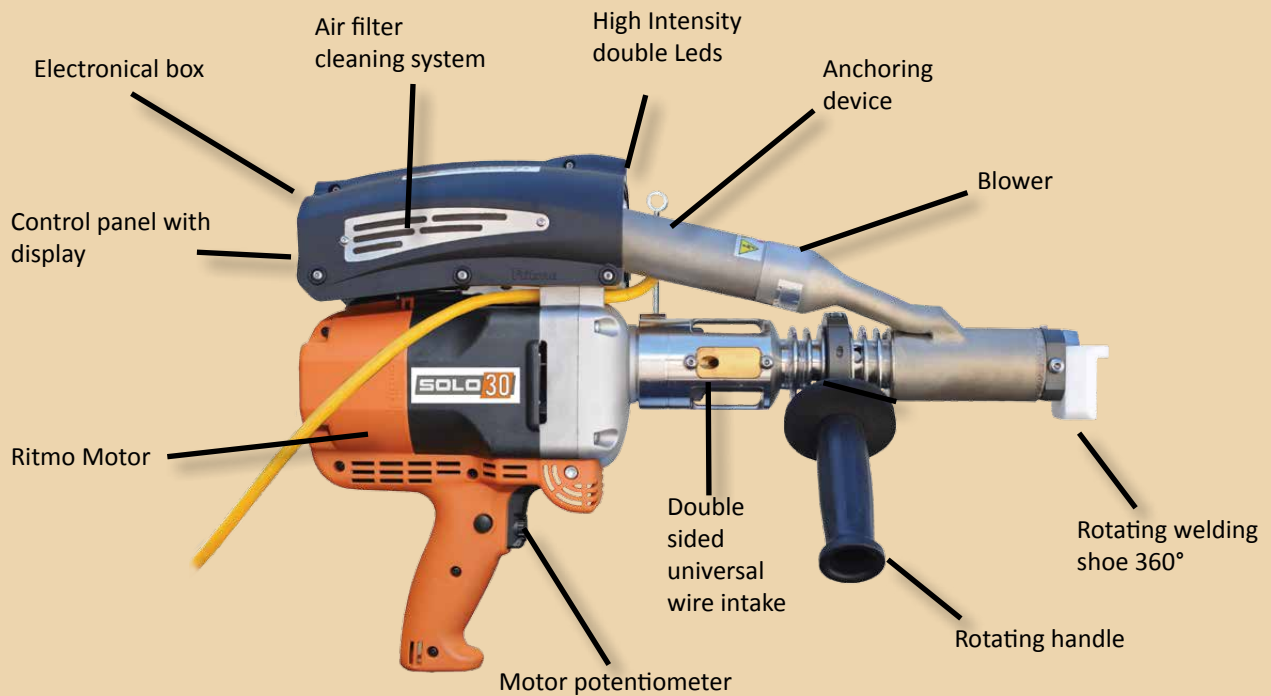





Product code
 SOLO 20 CE plug 97800130
 SOLO 20 Schuko plug 97800132

SOLO 20

Stargun SOLO 20 is an essential extruder able to perform quality weldings. Solid, compact, reliable, the extruder is equipped with a motor potentiometer for the speed adjustment and a security system "motor block" to prevent cold starts. The temperature control is on the blower and can be set on the control panel.

- Backlight Display
- Double LEDs for the lightening of the welding area
- Potentiometer; security system "motor block/cold start"
- Single T° thermoregulator: air
- Rotating handle
- 360° rotating welding shoes. Easily replaceable.

Standard equipment


- SOLO 20, transport case and extruder support;
- Rotating welding shoe mod. 90° - a 7 mm cod. 86777821
 - Rotating welding shoe mod. V Flat 10/12 mm cod. 86777830

On request


Wide range of welding shoes

Materials	HDPE, PP
Rods	Ø 3 - 4 mm
Sheets	1,5 ÷ 20 mm
* Output up to	2,2 Kg/h HDPE rod Ø 4 mm
Dimensions	450 x 310 x 100 mm;
Power supply	230 Vac 50/60 Hz
Total absorbed power	2700 W
Weight	6,85 Kg

* The output varies depending on the material





Conical 20
86777817




Conical 14
86777818


WELDING SHOES SOLO 20




360° ROTATING SHOES		
Model	Sheet thickness	Article
90° - a 4.2 mm	6 mm	86777819
90° - a 5.6 mm	8 mm	86777820
90° - a 7 mm	10 mm	86777821
90° - a 8,4 mm	12 mm	86777822
90° - a 10,5 mm	15 mm	86777823
90° - a 14 mm	20 mm	86777824



V - Welding




X - Welding




360° ROTATING SHOES			
Model	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777829
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777830
V Flat - 15	15 mm	30 mm	86777831
V Flat - 20	20 mm	40 mm	86777832



Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)



Special nozzle 180 mm
86777800



Product code
 SOLO 30 CE plug 97800140
 SOLO 30 Schuko plug 97800142

SOLO 30

Stargun SOLO 30 is essential, versatile, solid combined with qualities such as compactness, quality and reliability. The extruder welds with \varnothing 3-4-5 mm wire; it is equipped with a motor potentiometer for the speed adjustment and a security system "motor block" to prevent cold starts. The temperature control is on the blower and can be set on the control panel.

- Backlight Display
- Double LEDs for the lightening of the welding area
- Potentiometer; security system "motor block/cold start"
- Single T° thermoregulator: air
- Rotating handle
- 360° rotating welding shoes. Easily replaceable.

Standard equipment:


- SOLO 30, transport case and extruder support;
- Rotating welding shoe mod. 90° - a 105, mm cod. 86777823
- Rotating welding shoe mod. V Flat - 15 mm cod. 86777831

On request


Welding shoes, KIT Geotextiles

Materials	HDPE, PP
Rods	\varnothing 3 - 4 - 5 mm
Sheets	1,5 ÷ 30 mm
* Output up to	3,2 Kg/h HDPE rod \varnothing 5 mm
Dimensions	500 x 310 x 100 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	3100 W
Weight	7,1 Kg

* The output varies depending on the material



Conical 20
86777817




Conical 14
86777818



Geotextile
86777814


WELDING SHOES SOLO 30

90° - Welding




360° ROTATING SHOES		
Model	Sheet thickness	Article
90° - a 5.6 mm	8 mm	86777820
90° - a 7 mm	10 mm	86777821
90° - a 8,4 mm	12 mm	86777822
90° - a 10,5 mm	15 mm	86777823
90° - a 14 mm	20 mm	86777824
90° - a 17,5 mm	25 mm	86777825
90° - a 21 mm	30 mm	86777826

V - Welding




X - Welding



360° ROTATING SHOES			
Model	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777829
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777830
V Flat - 15	15 mm	30 mm	86777831
V Flat - 20	20 mm	40 mm	86777832




Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)



Special nozzle 180 mm
86777800

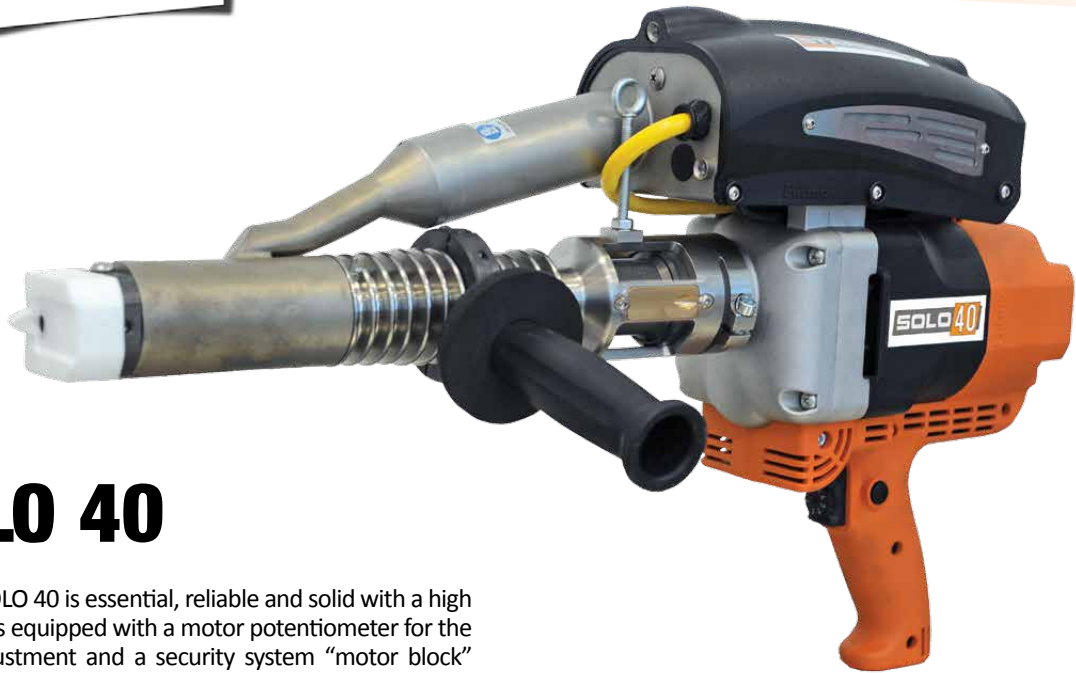

SOLO 40

Stargun SOLO 40 is essential, reliable and solid with a high output; it is equipped with a motor potentiometer for the speed adjustment and a security system "motor block" to prevent cold starts. The temperature control is on the blower and can be set on the control panel.

- Backlight Display
- Double LEDs for the lightening of the welding area
- Potentiometer; security system "motor block/cold start"
- Single T° thermoregulator: air
- Rotating handle
- 360° rotating welding shoes. Easily replaceable.

Standard equipment:

- SOLO 40, transport case and extruder support;
- Rotating welding shoe mod. 90° - a 10,5 mm cod. 86777823
- Rotating welding shoe mod. V Flat - 15 mm 86777831

On request


Welding shoes, KIT geotextiles

Materials	HDPE, PP
Rods	Ø 4 - 5 mm
Sheets	1,5 ÷ 30 mm
* Output up to	4 Kg/h HDPE rod Ø 5 mm
Dimensions	550 x 310 x 100 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	3300 W
Weight	7,6 Kg

* The output varies depending on the material



Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)



Special nozzle 180 mm
86777800

Product code


SOLO 40 CE plug 97800150

SOLO 40 Schuko plug 97800152

WELDING SHOES 40




90° - Welding




360° ROTATING SHOES		
Model	Sheet thickness	Article
90° - a 5.6 mm	8 mm	86777820
90° - a 7 mm	10 mm	86777821
90° - a 8,4 mm	12 mm	86777822
90° - a 10,5 mm	15 mm	86777823
90° - a 14 mm	20 mm	86777824
90° - a 17,5 mm	25 mm	86777825
90° - a 21 mm	30 mm	86777826


V - Welding




X - Welding



360° ROTATING SHOES			
Model	V welding "S"	X welding "S"	Article
V Flat - 8	8 mm	16 mm	86777829
V Flat - 10/12	10 - 12 mm	20 - 25 mm	86777830
V Flat - 15	15 mm	30 mm	86777831
V Flat - 20	20 mm	40 mm	86777832



Conical 20
86777817



Conical 14
86777818



Geotextile
86777814



Solo 40

Fluxia

5749311

PRODUCTS OVERVIEW



	LINK 20	LINK 30	LINK 40	K-SB 50	K-SB 60	SOLO 20	SOLO 30	SOLO 40
Materials	HDPE; PP, PVDF	HDPE; PP, PVDF	HDPE; PP,	HDPE; PP,	HDPE; PP,	HDPE; PP,	HDPE; PP,	HDPE; PP,
Max. Output HDPE (the output varies according to the material)	2,2 Kg/h rod Ø 4 mm	3,2 Kg/h rod Ø 5 mm	4 Kg/h rod Ø 5 mm	5 Kg/h rod Ø 5 mm	6,2 Kg/h rod Ø 5 mm	2,2 Kg/h rod Ø 4 mm	3,2 Kg/h rod Ø 5 mm	4 Kg/h rod Ø 5 mm
Usable rod Ø	3-4 mm	3-4-5 mm	4-5 mm	4-5 mm	4-5 mm	3-4 mm	3-4-5 mm	4-5 mm
Weldable sheet/foil (thickness)	1,5 ÷ 20 mm	1,5 ÷ 30 mm	1,5 ÷ 30 mm	1,5 ÷ 40 mm	1,5 ÷ 40 mm	1,5 ÷ 20 mm	1,5 ÷ 30 mm	1,5 ÷ 40 mm
Temperature control	Double	Double	Double	Double	Double	Single	Single	Single
Lateral fix air flow	-	-	-	✓	✓	-	-	-
360° rotating air flow and welding shoe	✓	✓	✓	On request	On request	✓	✓	✓
Graphic display	✓	✓	✓	✓	✓	✓	✓	✓
Potentiometer	✓	✓	✓	✓	✓	✓	✓	✓
* Security sistem motor block / cold start	✓	✓	✓	✓	✓	✓	✓	✓
Optional handle	-	-	-	✓	-	-	-	-
Dimensions cm	51 x 26 x 10	54 x 26 x 10	64 x 26 x 10	Back Handle 72 x 26 x 10 Pistol Grip Handle 60 x 33 x 10	73 x 26 x 10	45 x 31 x 10	50 x 31 x 10	55 x 31 x 10
Power supply	230 V 50/60 Hz	230 V 50/60 Hz	230 V 50/60 Hz	230 V 50/60 Hz	230 V 50/60 Hz	230 V 50/60 Hz	230 V 50/60 Hz	230 V 50/60 Hz
Absorbed power	3100 W	3500 W	3500 W	4000 W	4200 W	2700 W	3100 W	3300 W
Weight	6,5 Kg	6,8 Kg	7,6 Kg	9 Kg	9,3 Kg	6,85 Kg	7,1 Kg	7,6 Kg

*Not available for the German market

Related Service

In addition to the extruders RITMO also offers welding rod

Rods:
HDPE Ø 4 - 5 mm
PP Ø 3 - 4 mm





The information and photos in this publication are not binding and RITMO S.P.A. is free to make any alterations without prior notice.

RITMO S.p.A.
Via A. Volta, 35/37 - 35037
Bresseo di Teolo (PADOVA) ITALY

Ph. +39 049 9901888
Fax +39 049 9901993

info@ritmo.it
www.ritmo.it

